
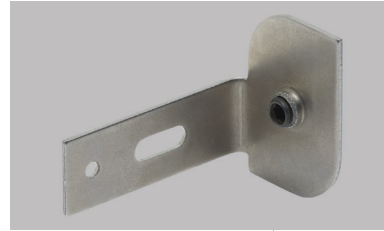


TERMINUS SEMI-CONCEALED PERIMETER TRIM

WALL ANGLE & TERMINUS TRIM

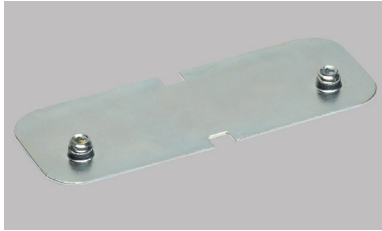


Terminus Semi-Concealed Perimeter Trim provides a perimeter finishing solution for suspended ceiling installations with a semi- or fully-concealed edge.


FEATURES AND BENEFITS

- Cloud Perimeter Trim solution designed for use with Ecophon® Focus™ Dg and Ds ceiling panels
- Semi-concealed trim available in straight or curved (Face-In or Face-Out)
- Sturdy extruded aluminium coupled with double grooved channel provides additional strength
- Four profile heights available (up to 8") with mitered and welded corner kits
- Available in Standard White and Black. Additional color options are offered through our Post-Paint process. See the Visual Options – Suspension Systems page for color option details.

SYSTEM COMPONENTS




SPLICE CLIP
TTSPLICE



TWIST CLIP
TTTC

PROFILES

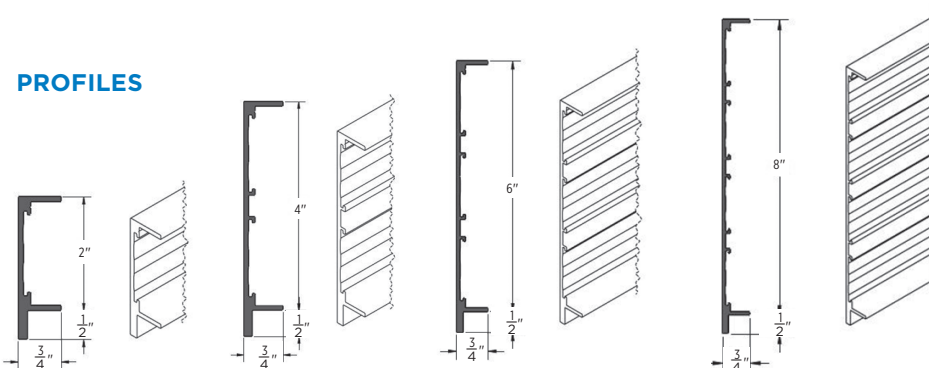

LEED® v4

RECYCLED CONTENT	45%	
	PRE: 11%	POST: 34%

- ✓ MR: PBT Source Reduction (Healthcare)
- ✓ MR: Sourcing Raw Materials
- ✓ MR: Environmental Product Declaration (EPDs)
- ✓ MR: Construction and Demolition Waste Management Planning

LEED® is a registered trademark of the U.S. Green Building Council.

CERTIFICATIONS & PRODUCT DECLARATIONS



EPD AVAILABLE

ARCHITECTURAL

CertainTeed
SAINT-GOBAIN

TERMINUS SEMI-CONCEALED PERIMETER TRIM

TERMINUS SEMI-CONCEALED

	DESCRIPTION	COLOR	LENGTH (IN)	HEIGHT (IN)	FACE (IN)	RECYCLED CONTENT PRE*	RECYCLED CONTENT POST*	RECYCLED CONTENT TOTAL*
SEMI-CONCEALED STRAIGHT								
TTSC-2 WHT	2" Semi-Concealed Terminus Cloud Perimeter Trim	White	120"	2.5"	3/4"	11%	34%	45%
TTSC-4 WHT	4" Semi-Concealed Terminus Cloud Perimeter Trim	White	120"	4.5"	3/4"	11%	34%	45%
TTSC-6 WHT	6" Semi-Concealed Terminus Cloud Perimeter Trim	White	120"	6.5"	3/4"	11%	34%	45%
TTSC-8 WHT	8" Semi-Concealed Terminus Cloud Perimeter Trim	White	120"	8.5"	3/4"	11%	34%	45%

SEMI-CONCEALED CURVED								
TTSCR-2 WHT	Curved 2" Semi-Concealed Terminus Cloud Perimeter	White	120"	2.5"	3/4"	11%	34%	45%
TTSCR-4 WHT	Curved 4" Semi-Concealed Terminus Cloud Perimeter	White	120"	4.5"	3/4"	11%	34%	45%
TTSCR-6 WHT	Curved 6" Semi-Concealed Terminus Cloud Perimeter	White	120"	6.5"	3/4"	11%	34%	45%
TTSCR-8 WHT	Curved 8" Semi-Concealed Terminus Cloud Perimeter	White	120"	8.5"	3/4"	11%	34%	45%

Curves are limited to a minimum of 24" face-in or face-out. For more information, please see the Minimum Curve Radius Technical Memo.

SEMI-CONCEALED CORNER KITS (MITERED AND WELDED)								
TTSCCKI-2 WHT	2" Semi-Concealed Inside Corner Kit	White	2"	2.5"	3/4"	11%	34%	45%
TTSCCKO-2 WHT	2" Semi-Concealed Outside Corner Kit	White	2"	2.5"	3/4"	11%	34%	45%
TTSCCKI-4 WHT	4" Semi-Concealed Inside Corner Kit	White	2"	4.5"	3/4"	11%	34%	45%
TTSCCKO-4 WHT	4" Semi-Concealed Outside Corner Kit	White	2"	4.5"	3/4"	11%	34%	45%
TTSCCKI-6 WHT	6" Semi-Concealed Inside Corner Kit	White	2"	6.5"	3/4"	11%	34%	45%
TTSCCKO-6 WHT	6" Semi-Concealed Outside Corner Kit	White	2"	6.5"	3/4"	11%	34%	45%
TTSCCKI-8 WHT	8" Semi-Concealed Inside Corner Kit	White	2"	8.5"	3/4"	11%	34%	45%
TTSCCKO-8 WHT	8" Semi-Concealed Outside Corner Kit	White	2"	8.5"	3/4"	11%	34%	45%

*Maximum recycled content. Recycled content varies by manufacturing plant.
All pieces include splices and twist clips for installation. Additional splices and twist clips available for order.
Custom lengths available upon request.
Additional angled corners available upon request.

PHYSICAL DATA

MATERIAL

Extruded aluminum

FACE DIMENSION

3/4"

SURFACE FINISH

Fully Painted

PROFILE HEIGHT

Profile dependent

WARRANTY

10-year Limited Suspension Systems warranty increases to 15 years when installed with CertainTeed ceiling panels. Full warranty information can be found at certainteed.com/warranty.




TERMINUS SEMI-CONCEALED PERIMETER TRIM

VISUAL OPTIONS — SUSPENSION SYSTEMS


ACOUSTICAL AND DRYWALL SUSPENSION SYSTEMS AND TERMINUS TRIM

Our newly expanded post-paint process allows for any CertainTeed Suspension System product to be painted in a variety of new colors, matching all CertainTeed colors along with any Sherwin-Williams® colors requested by the customer. We can also match any color if a color sample is provided.

CERTAINTEED STANDARD

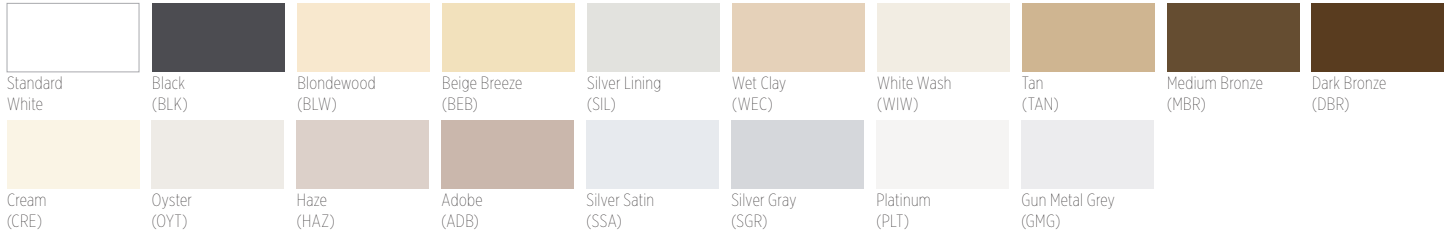

ECOPHON®

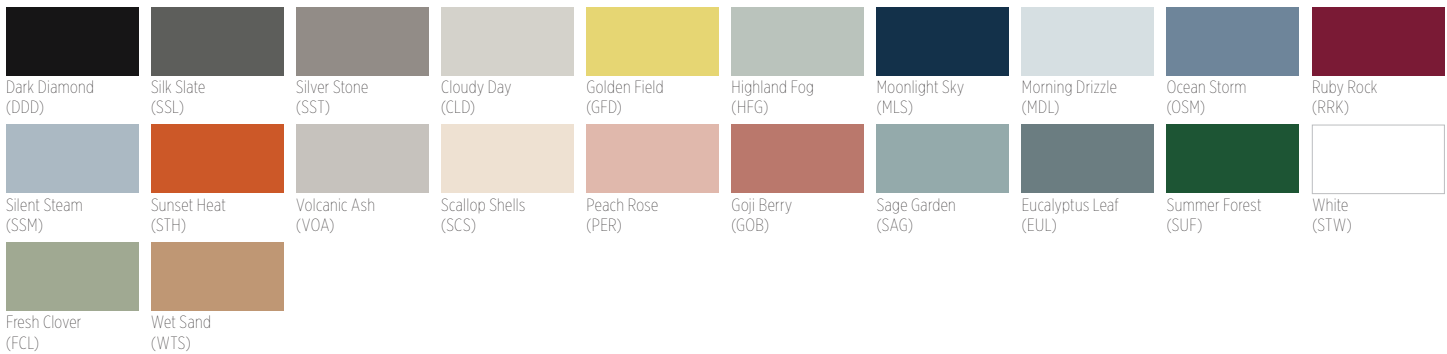

METAL CEILINGS



For Special color options, contact your local sales representative.


The colors shown have been reproduced with all the fidelity possible with commercial printing processes. Also, a specific color may appear different on one class of product than another.

When placing an order for either Standard or Special colors, please use the following naming process proceeding each catalog code:

Standard face paint: ST + 3-letter color code
Standard 360 paint: 3T + 3-letter color code
Special face paint: SP + 3-letter color code
Special 360 paint: 3P + 3-letter color code

Example:
EZCS4-12-12 ST WEC

Example: EZCS4-12-12 ST WEC

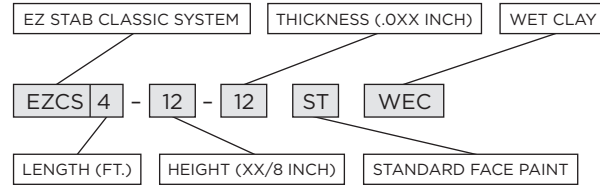

CertainTeed ARCHITECTURAL

METAL • WOOD • FELT • FIBERGLASS & MINERAL FIBER • GYPSUM • SUSPENSION & INTEGRATED SYSTEMS
20 Moores Road, Malvern, PA 19355 800-233-8990 certainteed.com/architectural