


FEATURES AND BENEFITS


- Provides a seamless integration of glass walls into drywall and acoustical suspended ceilings
- Available in four profiles to transition from acoustical and drywall ceilings
- Sturdy extruded-aluminum construction with fully-painted surface
- Available in CertainTeed White and Black. Additional color options are offered through our Post-Paint process. See the Visual Options – Suspension Systems page for color option details.

SYSTEM COMPONENTS

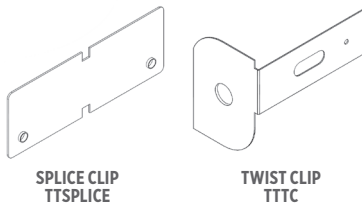

For Special color options,
contact your local sales representative.

PROFILES

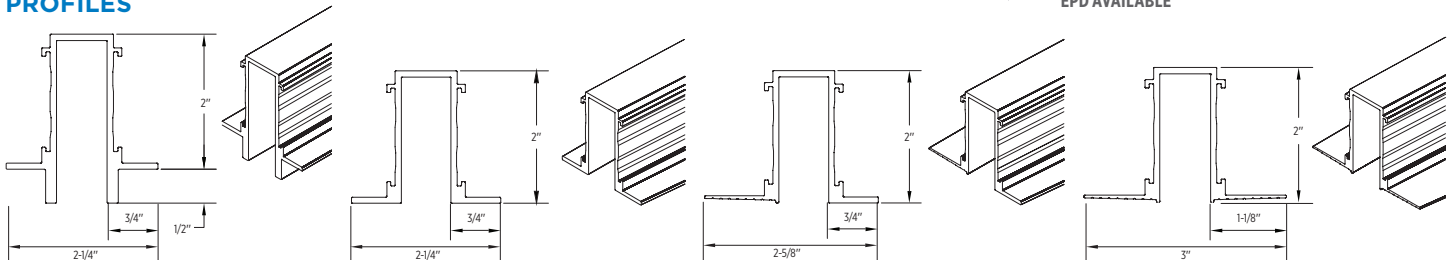

LEED® v4

RECYCLED CONTENT	45%	
	PRE: 11%	POST: 34%

- ✓ MR: PBT Source Reduction (Healthcare)
- ✓ MR: Sourcing Raw Materials
- ✓ MR: Environmental Product Declaration (EPDs)
- ✓ MR: Construction and Demolition Waste Management Planning

LEED® is a registered trademark of the
U.S. Green Building Council.

CERTIFICATIONS & PRODUCT DECLARATIONS



EPD AVAILABLE

TERMINUS GLAZING CHANNEL

TERMINUS GLAZING CHANNEL	DESCRIPTION	COLOR	LENGTH (IN)	HEIGHT (IN)	FACE (IN)	RECYCLED CONTENT PRE*	RECYCLED CONTENT POST*	RECYCLED CONTENT TOTAL*
GLAZING CHANNEL								
TTGCA WHT	Acoustical to Acoustical Terminus Glazing Channel	White	120"	2"	2-1/4"	11%	34%	45%
TTGCAD WHT	Acoustical to Drywall Terminus Glazing Channel	White	120"	2"	2-5/8"	11%	34%	45%
TTGCCS WHT	Semi-Concealed to Semi-Concealed Terminus Glazing Channel	White	120"	2.5"	2-1/4"	11%	34%	45%
TTGCDD WHT	Drywall to Drywall Terminus Glazing Channel	White	120"	2"	3"	11%	34%	45%

*Maximum recycled content. Recycled content varies by manufacturing plant.
All pieces include splices and twist clips for installation. Additional splices and twist clips available for order.
Custom lengths available upon request.

PHYSICAL DATA

MATERIAL

Extruded aluminum

SURFACE FINISH

Fully Painted

PROFILE HEIGHT

2"

WARRANTY

10-year Limited Suspension Systems warranty increases to 15 years when installed with CertainTeed ceiling panels. Full warranty information can be found at certainteed.com/warranty



CertainTeed ARCHITECTURAL

METAL • WOOD • FELT • FIBERGLASS & MINERAL FIBER • GYPSUM • SUSPENSION & INTEGRATED SYSTEMS
20 Moores Road, Malvern, PA 19355 800-233-8990 certainteed.com/architectural

© 10/22 CertainTeed, Printed in the USA, Code No. 11-11-435-US-EN